

& KUROLOK RL™
ZIPPED-EDGE ROOFLIGHT SYSTEM



& KUROLOK RL™

ZIPPED-EDGE ROOFLIGHT SYSTEM

Zipped-edge fabric retention combined with powerful constant-tension spring technology is what makes KuroLok RL the perfect solution for rooflights.

OVERVIEW

- Tensioned rooflight blind system
- Zipped-edge fabric retention
- 5 year warranty
- Sizes up to 3m wide, 4.1m drop, 9m²
- Includes headboxes and slim side channels

SYSTEM DETAILS

Taking all the unique benefits of the KuroLok system and adding powerful constant-tension spring (CTS) units gives you KuroLok RL. This is a system that can operate at any angle from vertical to horizontal, with the blind drawing upwards, downwards or sideways.

KuroLok RL features extruded aluminium headboxes and slim side channels, with the fabric locked in using zip technology. Headboxes at each end of the blind are either 100mm or 125mm high, depending on blind size. The slim side channels are only 35mm wide. Universal profiles allow the frame to be fixed through the top, face or sides as required.

USES & APPLICATIONS

Secured along the edges and held under tension, the fabric on a KuroLok RL blind can shade or darken large areas with minimal sagging.

KuroLok RL blinds are faster and easier to install than comparable systems, and are robustly built to provide a maintenance-free blind. L-angle profiles can be supplied to create a simple and beautiful rooflight installation. Or headboxes and side channels can be recessed into walls or ceilings for the ultimate built-in look. Motorised operation makes controlling your KuroLok RL blinds easy from anywhere.



LIGHT & SHADE

&KUROLOK RL™

ROLLER SHADE FEATURES

MAX SIZE
9m²




- FABRIC ZIP SIDE CHANNELS**
- Slim 35mm wide channel
 - Zipped-edge fabric retention
 - Wider 56mm channel also available



- CONSTANT TENSION SPRING UNITS**
- 4kg pull force per unit
 - Tension is constant throughout extensions and retraction
 - Fabric under tension at any angle



- HEADBOXES**
- 100 x 92.5mm and 125 x 117.5mm headboxes to suit blind size
 - Connects to side channel with sturdy steel legs
 - Fascia removable within 100mm or 125mm

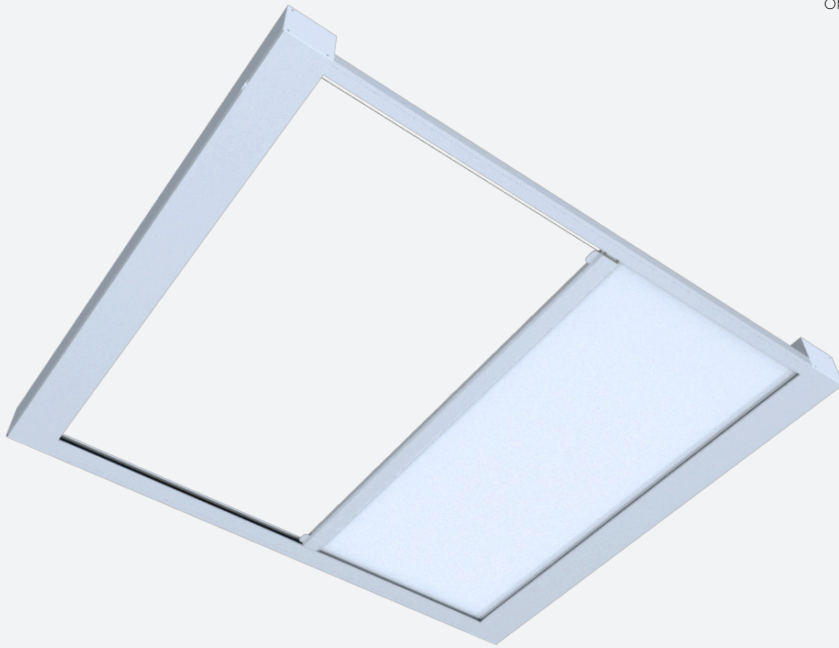

CONTROL OPTIONS




- Motorised (recommended)
- Crank-handle with reduction gear (limited sizes)

MOTORISATION CONTROLS



- Hardwired Switch
- Radio remote control
- Digital and IP communication
- Integration and control systems


FABRIC OPTIONS




- Dimout fabrics for light filtering and privacy
- Sunscreen fabrics for glare control with views out
- Blackout fabrics for room darkening

SYSTEM SPECIFICATION

FABRIC RETENTION SIDE CHANNELS

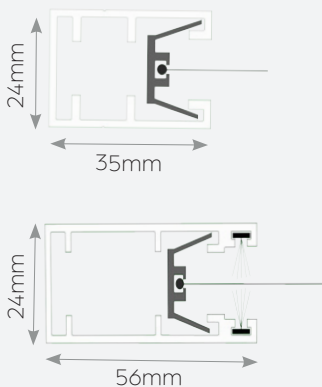

KUROLOK HEADBOX DIMENSIONS

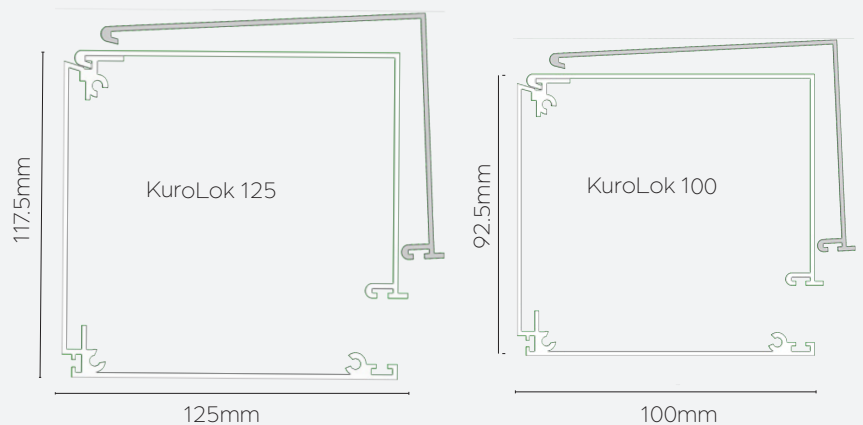

UMBRA® YOU

SELECT YOUR SYSTEM


See Systems Overview brochure for more information

ROOFLIGHT SYSTEMS

BLACKOUT SYSTEMS →

SQUARE AREA

18m²




& KUROLOK™
TWIN RL

9m²



& KUROLOK™
RL

4m²



& HELIOS™
RL

24m²



& KUROLOK™

BLACKOUT SYSTEMS

ROLLER SHADES →

14m²



& KURO™

LARGE

16m²



& HELIOS™

MEDIUM

6m²



& SIRIOS™

SMALL

3m²



& ORBIS™

SELECT YOUR FABRIC



VIEW OUR RANGE
OF FABRICS ONLINE

www.umbrashading.co.uk/products-services/blind-fabrics

FIND OUT MORE

FOR MORE SYSTEM INFO AND AUTOMATION
OPTIONS VISIT

www.umbrashading.co.uk/tools/product-selector-guide

In line with our policy of continuous product development, we reserve the right to alter specifications without notice.

UMBRA®

01792 562015

sales@umbrashading.co.uk
www.umbrashading.co.uk