

PRODUCT DESCRIPTION

Perfect Fit is a remarkable innovation, whereby using a simple snap-fit operation, without the use of screws, the blind, in a Perfect Fit frame, is fitted neatly and without fuss into the window frame. Due to its unique construction, Perfect Fit becomes part of the window, without interfering with handles or window ledges, and can easily be removed for cleaning or replacement. With its stylish and contemporary appearance, light gaps are minimised, giving exceptional control of light and improving insulation.

PERFECT FIT STANDARD FRAME

Designed to fully integrate with all modern windows including tilt and turn and half glazed doors, this unique design fits neatly into the frame of your windows and doors. The patented no-drill bracket system means that blinds can be clipped in place in a couple of minutes.

A 25mm Wood Blind can be supplied on a colour-matched wood tone Roulett headrail. All 25mm Venetian blinds can be manufactured with side guides if required as can our 20mm Pleated blinds. Frames come in white, brown or silver. For Velux windows, we can offer a Perfect fit frame complete with Pleated blinds only, again in white, brown or silver.

A new feature for Perfect Fit Pleated or Cellular blinds is the innovative use of two adjustable rails allowing the blind to be moved from the top down as well as from the bottom upwards. The blind can be set at the exact position you require, to provide the shade that you want whilst still allowing light into the room. Especially suitable for providing privacy in ground floor and basement flats, and shade for computer screens.

An addition to the Perfect Fit family is a compact roller blind on a 25mm barrel offering similar features to that of the pleated system.

Now Perfect Fit blinds are also available without cord loops, making it especially safe for children.


FABRICS/MATERIALS

Choose from our extensive range of Venetian finishes or Pleated or Roller fabrics. Many of our Pleated Blinds have SPC (Solar Protective Coating) or ASC (Advance Solar Control) coating on the reverse of the fabric for higher reflectance of solar heat and light.

FIXING

All blinds will be supplied with brackets already fitted to the frame. Brackets are available in three sizes: 18mm, 20mm and 24mm. Extended clips enable fitting of Perfect Fit frames to Velux windows.

Before fitting to window, ensure that there is a 6mm clearance all around the outside of the window beading to allow enough room for the Perfect Fit frame to fit. The frame is assembled using 4 corner joints which are then secured by tightening screws at each joint.

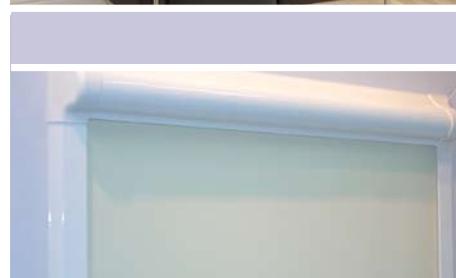

RECOMMENDATIONS

	Min Width	Max Width	Max Drop	Max Area
15mm Venetian Blinds:		1850mm	2450mm	4 sq m
25mm Venetian Blinds:		1850mm	2450mm	4 sq m
25mm Wood Blinds:		1500mm	2000mm	2 sq m
20mm Freehanging Pleated Blinds P1100:		1850mm	2450mm	5 sq m
20mm Freehanging Pleated Blinds P1400:		1500mm	2000mm	3 sq m
Roller Blinds (subject to fabric):	350mm	1400mm	2000mm	3 sq m